

VCR SYSTEM USING R-600a/ POE OIL/MINERAL OIL/NANO-SiO₂ AS WORKING FLUID: AN EXPERIMENTAL INVESTIGATION

M.S.Bandgar¹, R. N. Kare²

^{1,2}Assistant Professor, JSPM's Imperial College of Engineering & Research, Wagholi, Pune-14, (India)

ABSTRACT

The aim of this work is to evaluate the performance of Vapour Compression Refrigeration System using SiO₂ nano particles mixed with Polyolester (POE) oil / Mineral oil (MO) as Nano lubricant and R-600a as a refrigerant. This paper investigates which type of lubricant oil works better with SiO₂ nanoparticles in the field of refrigeration. POE Oil / Mineral Oil are mixed with Silica Nano particles by ultrasonic sonication and stirring process to prepare the Nano lubricants. These Nano lubricants were used in the compressor of refrigeration system instead of RL68H oil/SUNISO 3GS oil. An investigation was done on the compatibility of POE/Mineral oil mixed with Silica (SiO₂) Nano powder (at a concentration of 0.5%, 1% and 1.5% by mass fraction) as Nano lubricant. The replacement of Polyol-ester lubricant by the mineral lubricant mixed with SiO₂ reduces power consumption. It gives better results at mass fraction of 0.5% for all combinations of Nano-oils. It was found that the time required reducing the temperature of water though 1^oC is less and the power consumption reduces by 12.02% when POE oil is replaced by a mixture of (MO+ 0.5% Silica). It has been observed that C.O.P. is increased by 11.66% when POE is replaced by a Nano lubricant (mineral oil + 0.5% of SiO₂). Thus the use of above Nano lubricants in refrigeration system is favorable.

Keywords: COP; Mineral Oil; Nano Particles; Nano Lubricant; VCR System; POE Oil; Silica (SiO₂).

I. INTRODUCTION

In a vapor compression refrigeration (VCR) system, the refrigerant undergoes phase change from liquid to vapor at the evaporator and then from vapor to liquid at the condenser in a closed cycle absorbing the heat in the evaporator and rejecting it at the condenser. The coefficient of performance (COP), which is the ratio of refrigeration effect obtained at the evaporator to the power input to the compressor, can be increased either by increasing the heat removal rate or by decreasing the compressor work. [1].

The Global Warming Potential (GWP) of currently used R134a is high as 1300. The Ozone Depleting Potential (ODP) of R134a is also relatively high. The Montreal and Kyoto Protocol of United Nations suggests minimizing of Hydro Fluoro carbons (HFCs) to use as refrigerants. Researches show HFC 134a not much miscible with lubricant oil

in the compressor. European countries have already banned R134a. Blending of R134a with other HFC is a problem. R-22 and R134a will be phased out due to environmental issues. To overcome the above problem, refrigerant R600a is proposed in the present study because R600a has Zero Ozone Depleting Potential and a very less value of 3 as Global Warming Potential (GWP) when compared to other refrigerants. Pure substance R600a offers excellent thermodynamic properties nontoxic and compatibility with the conventional oil in compressor. R600a has been already approved for use in refrigeration applications as an alternative to R134a by Godrej Refrigeration.

Oil is necessary for a correct working of the compressor in the refrigeration and air-conditioning vapour compression systems. Its main role is to ensure the existence of a thin oil film allowing the lubrication of the mechanical moving elements, in order to protect them against wear. The lubricant also plays several secondary roles as a tightness element, reducing the noise, or helping the evacuation of chemical deposits or impurities that may be present in the system. Nano-particles as additives are also considered to improve the lubrication properties of lubricant oil for the compressor of vapor compression refrigeration systems. Recently, different types of Nano-oils have attracted special attention because it has ability to reduce the friction and wear in compressor, which, in turn, improve the efficiency of the compressors and also reduce energy consumption. Thus, the use of Nano-oils is more beneficial to compressor performance. [2]

Various methods have been tried out for improving the COP of the vapor compression refrigeration system, as reported in the literature.

Nilesh Desai et al. [3] has carried out an experimental investigation of a vapor compression refrigeration system using R134a/SiO₂/polyester Nano refrigerant as working fluid. In the experiment the Nano-oil with specific concentrations of 1%, 2% and 2.5 % (by mass fraction) were added in the compressor oil. They found that as the nanoparticles concentration in POE oil increases, there is decrease in compressor work and it is optimum at 2%. It has been observed that energy saving can be achieved from a minimum value of 7.03% to a maximum value of 12.30% using Nano lubricant compared to traditional refrigerants. The result shows the COP of system were improved by 7.61%, 14.05% & 11.90%, respectively, when the Nano-oil was used instead of pure oil.

Subramani et al. [4] has carried out an experimental investigation of a vapor compression refrigeration system. In experimental study, three cases have been considered. The hermetic compressor filled with i) pure POE oil ii) SUNISO 3GS oil (mineral oil) and iii) SUNISO 3GS+ Al₂O₃ Nano-particles as lubricant. The mass fraction of the Nano-particles in the Nano-lubricant is 0.06%. The reduction in power consumption is 18% if the SUSISO 3GS is used instead of POE Oil and a reduction of 25% is observed when SUNISO 3GS is mixed Nano-particles and SUNISO 3GS + Al₂O₃ Nano-particle mixture has the highest COP when compared with the other cases. The advantages of adding Nano-particle to the lubricant is that it reduces the power consumption of the compressor and there is sub cooling of the Nano-refrigerant in the condenser which in turn increases the COP.

R. Reji Kumar et al. [5] analyzed the heat transfer enhancement in a domestic refrigerator and found the normal and safe working of R600a refrigerant and mineral oil mixture with Nanoparticles. He also found that the freezing capacity of the refrigeration system is higher with mineral oil + alumina Nanoparticles oil mixture compared with the system of POE oil.

This research paper focuses on the energy consumption reduction by using SiO_2 as a Nano-lubricant. However, there is very less research work on the SiO_2 as Nano-particles as additives with oils used in refrigeration system. It is revealed that this research work will be useful to overcome the challenges of Nano-lubricant.

II. MATERIALS AND METHODS

This section provides a description of the materials and methodology used for conduction experimental work on a VCR test rig.

2.1. Materials: In this section materials required, properties of materials and specification of experimental setup has been discussed.

2.1.1 Refrigerant

The working fluid used in the refrigeration system is termed as refrigerant. HFC134a having high GWP is the most widely used alternative refrigerant in refrigeration equipment such as domestic refrigerators, chillers and automobile air conditioners. R-600a has been accepted as long term alternative refrigerant to HFC134a in many countries due to its low GWP.



Fig. 1 Isobutane (R-600a)

Table1 Properties of R-600a $[(\text{CH}_3)_3\text{CH}]$ [5]

Critical Temperature ($^{\circ}\text{C}$)	135
Critical Pressure (M Pa)	3.65
Ozone Depletion Potential	0
Global Warming Potential	3
Latent Heat of Vaporization (KJ/Kg)	362.6
Boiling Point ($^{\circ}\text{C}$)	-11.7
Liquid Melting Point ($^{\circ}\text{C}$)	-159.6
Molar Mass(g/mol)	58.12

2.1.2. Lubricating Oils

The lubricant oil, a type commonly used in refrigeration and air-conditioning systems are Polyol Ester (RL68H) and Mineral oil (VG32, SUNISO 3GS). These oils are selected owing to its common usage and superior quality.



Fig. 2 Polyol-ester oil (RL68H)



Fig. 3 Mineral Oil (VG32, SUNISO 3GS)

2.1.3 Nanoparticles

It is insoluble in water, odorless, Stable under normal, temperature and pressures.

Table 2 Properties of SiO₂Nanoparticles [6]

Melting Point (°C)	1713
Boiling Point (°C)	2950
Density (Kg/m ³)	2220
Specific heat (J/KgK)	745
Thermal Conductivity(W/m K)	1.4
Molecular Mass (g/mol)	60.08
Specific Surface Area (SSA)(m ² /g)	250
Average Particle Size (APS)(nm)	10-20



Fig. 4 Silica in powdered Form

2.2. Methods: In this section techniques and procedures adopted during experiments has been discussed.

2.2.1. Preparation of Nano lubricant

Preparation of Nano-oil for the lubrication is the first step in the experimental studies. The Nanofluids can be prepared using single step or two step methods [7]. In the present study two step procedures is used. The Nanoparticles are added to the refrigeration system by adding them first into the compressor lubricant to make a Nano-lubricant mixture then the mixture has put into the refrigeration test rig compressor as lubricant.

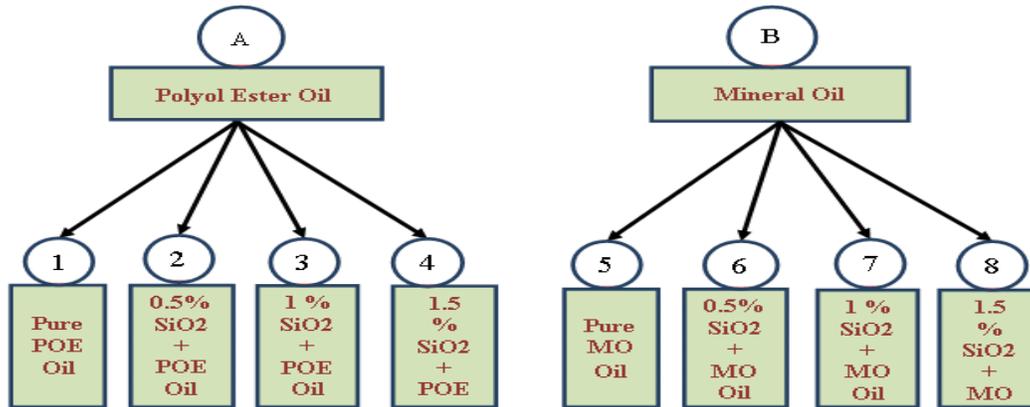


Fig. 5 Different blends of Nano Lubricant [9]

Commercially available Nanoparticles of silicon dioxide having average size in the range of 10-20 nm and purity of 99.9% were supplied by Nano wings private limited India. The required weight of the SiO₂ Nanoparticles was accurately measured by high precision electronic balance having a measurement range of 10 mg to 210 g and maximum error of 0.1 mg. Nano lubricant blends of POE-SiO₂ and MO-SiO₂ with different mass fractions were prepared as Shown in figure 5 and then the Nano oil mixture has kept on the magnetic stirrer to fully separate the Nanoparticles for 1 hr.



Fig.6 Nano lubricant on magnetic stirrer



Fig. 7 Nano lubricant on Ultrasonic vibrator

For getting the uniform dispersion of particles in the MO and POE oil a standard ultrasonic agitator is used for the period of 180 min. Experimental observation shows that the stable dispersion of SiO₂Nanoparticles can be kept for

more than 3 days without deposition or coagulation. No surfactant is added in this work because there may be any influence in diminution of thermal conductivity and performance [8]

III. EXPERIMENTAL SETUP AND TESTING

A. Experimental Set up.

The experimental refrigeration setup was fabricated with following components. A hermetically sealed reciprocating compressor for R-600a refrigerant, a forced type air cooled condenser, a capillary tube as an expansion valve and a Shell and coil type evaporator containing water. Five thermocouples, two pressure gauges and one energy meter are provided at respective locations to measure the temperatures at required locations, the inlet and outlet pressure of compressor and the power consumption respectively.



Fig. 8 Experimental set up.

B. Performance test on Vapour compression refrigeration system

The refrigeration system performance test includes energy consumption tests and freezing capacity tests. The type of evaporator used in this system is a water tank having a capacity of 14.5 liters. To measure the energy consumed during refrigeration system operation, time taken for 10 pulses is noted. The test is carried out for 30 min for each mixture of Nano fluid by noting down the average drop in temperature of water from its initial temperature. The freezing capacity is determined by the mass of water stored in the evaporator. [9]

C. Experimental Procedure

The refrigeration system experiment was carried out at various stages for different concentrations of Silica Nano powder with POE oil (RL68H) and Mineral oil (VG32) in VCRS using R-600a as refrigerant. First performance test was carried by using R-600a and pure POE oil for base data. In this operation, Evaporator tank is filled with water and initial temperature of water was measured at various points. Now, the system was run for 30 min, and for every 5 min., all the pressure, temperature and energy readings are noted down. After the completion of test with POE oil, lubricant oil was completely drained out from compressor and system was completely evacuated by connecting the vacuum pump to the charging line of compressor (service port) for 10 minutes. Again the compressor was charged with prepared Nano lubricant and R-600a refrigerant and complete performance test was carried out and the same procedure was repeated for each concentration of Nano lubricants. Same procedure was repeated for Mineral oil and its respective blends. [9]

IV. RESULTS AND DISCUSSION

a) Effect Nano lubricants on Freezing capacity

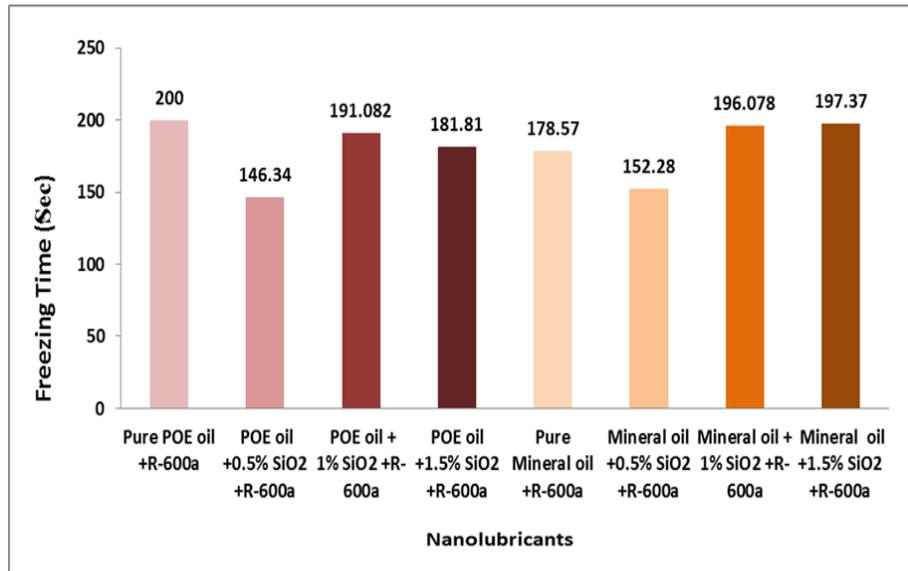


Fig.9 Effect of Nanoparticles on the freezing Capacity

From the figure 9 it is clear that, in both the cases the time required for reducing the cooling load temperature through 1°C is less at mass fraction of 0.5% of SiO₂. It was found less for the combination POE oil and 5% SiO₂. The time taken to reduce the temperature of water through 1°C with POE oil is 200 seconds and it is reduced

to 146.34 when POE+ 0.5 % of SiO₂ is used because the Nanoparticles present in the refrigerant improves the heat transfer rate in evaporator.

b) Effect of Nano lubricants on Energy Consumption

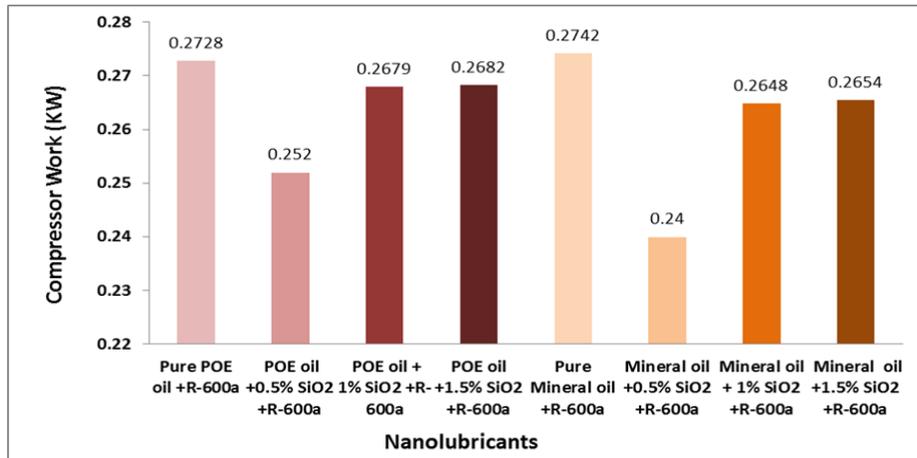


Fig. 10 Effect of Nano lubricants on the Power Consumption

The reduction in power consumption is 7.62 % when pure POE oil (RL68H) is replaced by Nano lubricant POE+0.5% of SiO₂. The reduction of 12.02 % is observed when MO is mixed with 0.5% of SiO₂.

c) Effect of Nano lubricants on Coefficient Of Performance

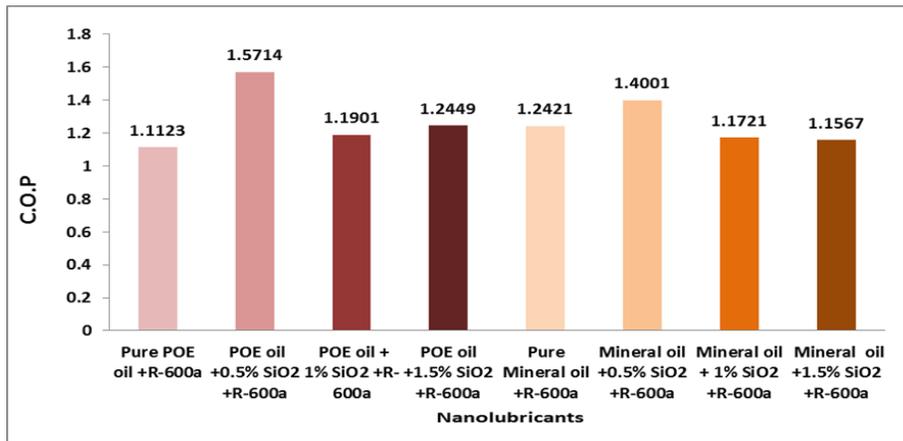


Fig. 11 Effect of Nano lubricants on the C.O.P

Figure 11 shows the effect of Nano-particles concentration on the coefficient of performance. The increase in COP is 11.66 % when POE oil is replaced with Mineral oil. It is found that the VCRS system using (0.5% SiO₂ +POE oil) as

lubricant has highest COP. When Nano lubricant (0.5% SiO₂ +POE oil) is used instead of (Mineral oil+0.5% SiO₂) then COP is increased from 1.2421 to 1.5714

V. CONCLUSIONS

Based on the experimental results and discussion, the following findings can be made. The results showed that the addition of nano SiO₂ improves the performance of the vapour compression refrigeration system significantly.

- In all cases freezing capacity is better at 0.5 % of SiO₂ and it is highest for system using POE oil mixed with 0.5% SiO₂ as lubricant.
- It has been observed that the compressor using mixture of mineral oil and 0.5% of silica consumes 12.06% less energy than POE oil.
- The VCR system has maximum COP of 1.5714 when 0.5% Silica is mixed with POE oil. The results indicated that R-600a works better with POE Oil than Mineral Oil.
- The replacement of R-600a with R-600a reduces power consumption effectively.

REFERENCES

- [1] R. Krishna Sabareesh , N. Gobinath , V. Sajith , Sumitesh Das and C.B. Sobhan, (2012), “Application of TiO₂ nanoparticles as a lubricant-additive for vapour compression refrigeration systems-An experimental investigation”. *International Journal of Refrigeration*, Vol.35, pp. 1989-1996.
- [2] Mohammed Youbi-Idrissi and, Jocelyn Bonjour, (2008), “The effect of oil in refrigeration: Current research issues and critical review of thermodynamic aspects”, *International Journal of Refrigeration*, Vol.31 pp.165-179.
- [3] Nilesh S. Desai and Professor P.R. Kulkarni, (2015) “A Review on performance of refrigeration system using Nano fluids,” *International Journal for Scientific Research & Development*, Vol. 3, pp. 2390-2394.
- [4] N. Subramani and M. J. Prakash, (2011) “Experimental studies on a vapour compression system using Nano refrigerants,” *International Journal of Engineering, Science and Technology* Vol. 3, pp. 95-102.
- [5] R. R.kumar, K. Sridhar , M. Narasimha, (2013),Heat transfer enhancement in domestic refrigerator using R600a/mineral oil/nano-Al₂O₃ as working fluid,*International Journal of Computational Engineering Research*, Vol.3, pp.42-50.
- [6] W.H. Azmi, K.V. Sharma, P.K. Sarma, R.Mamat, S. Anuar, V. Dharma Rao, (2013), Experimental determination of turbulent forced convection heat transfer and friction factor with SiO₂Nanofluid, *Experimental Thermal and Fluid Science*, Vol.51, pp.103–111.

- [7] S.M,Somjit P,(2013), Preparation and Stability of Nano fluids- A review, IOSR Journal of Mechanical and civil engineering, vol. 9, pp. 63-69.
- [8] Sendil Kumar, Dr. R. Elansezhian, (2012), Experimental Study on Al₂O₃-R134a Nano Refrigerant in Refrigeration System, International Journal of Modern Engineering Research (IJMER), Vol. 2, pp-3927-3929.
- [9] M. S. Bandgar K. P. Kolhe, S.S. Ragit, (2016), An experimental investigation of VCRS using R134a/ POE oil /mineral oil/nano-SiO₂as working fluid,Journal of Emerging Technology and Indian Research, vol.3 pp. 1-9.